

» fitness

**SPORTS FLOORING AND ELASTIC LAYERS
FOR FITNESS-CENTERS AND WEIGHT-LIFTING AREAS**



SPORTEC®



» **ECO SERIES**
PAGE 4-9



» **DESIGN SERIES**
PAGE 10-13



» **TILES SERIES**
PAGE 14-17



» **GYMCOUSTIC SERIES**
PAGE 18-21



» **TRACK SERIES**
PAGE 22-25



» **E-LAYER SERIES**
PAGE 28-29

» **POWERTURF SERIES** PAGE 26-27
» **EXTRAS** PAGE 30-31
» **ACCESSORIES** PAGE 32-33

Sprint sled

» **POWERTURF SERIES**

Sprint track Yoga & Pilates Group Fitness

» **TRACK SERIES**



Weight station Weight lifting > 40kg Freeweights < 40kg

» **TILES SERIES**
» **GYMCOUSTIC SERIES**
» **E-LAYER SERIES**

Spinning Treadmill Freeweights < 40kg

Crossfit Weight station Functional Training

» **ECO SERIES**
» **DESIGN SERIES**

» ECO SERIES





RUGGED. VERSATILE.
ERGONOMIC.




SPORTEC® color | neon | giga.

The eco series products are rugged, easy-to-clean and water resistant floor covering materials for use in fitness and gym facilities. Thanks to their excellent durability and high resistance to dynamic movement, these products are the all-rounder solutions for rubber flooring. Choose from our range of colours and hues to create a room that matches your colour scheme, offers great walking comfort and absorbs impact and room noise.


» SPORTEC® color

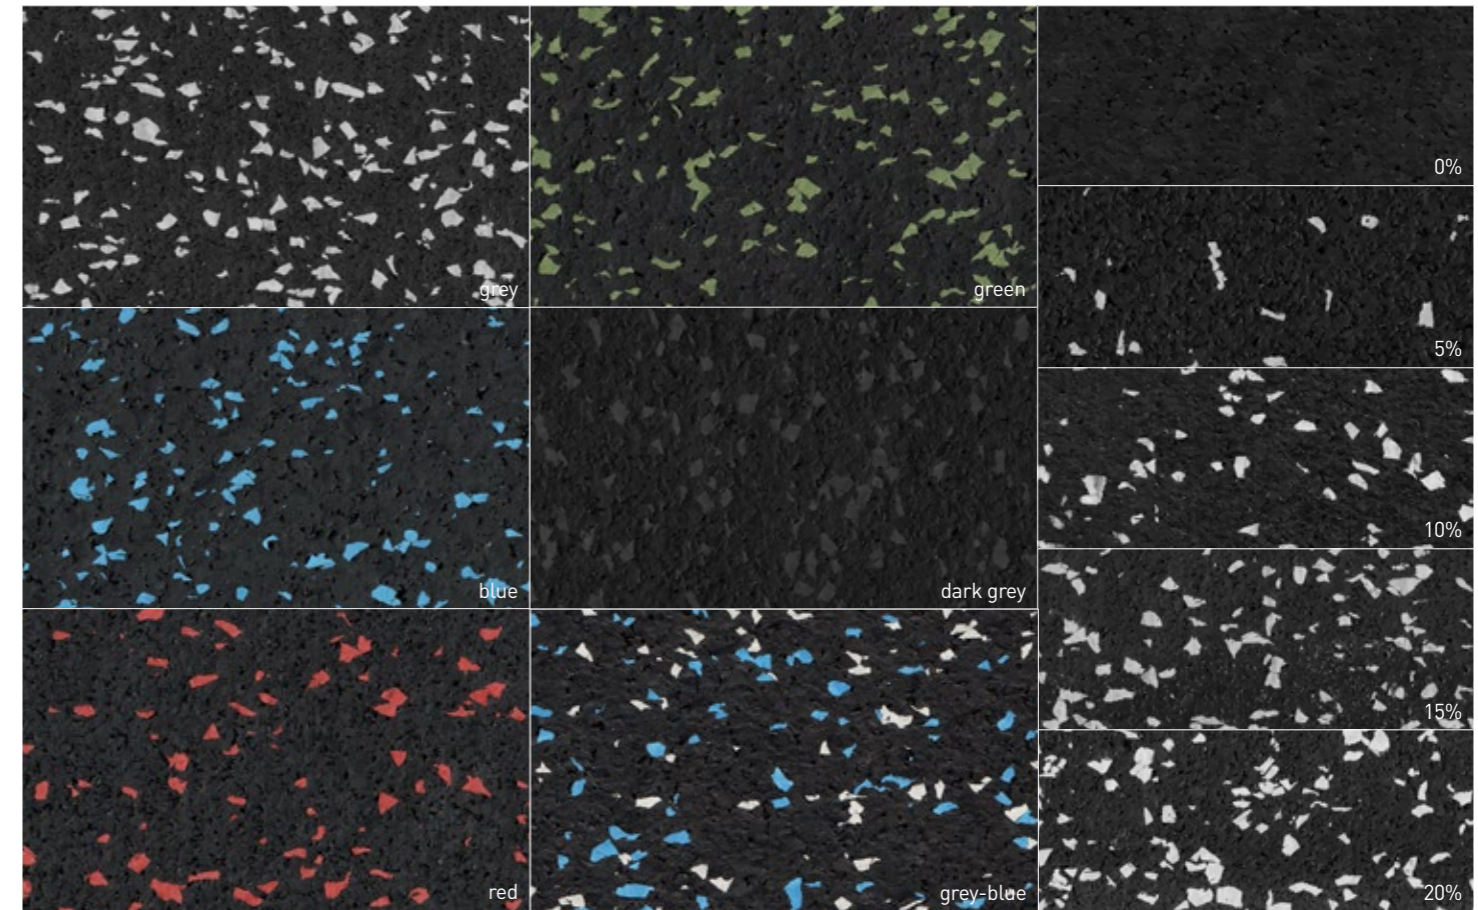

» SPORTEC® neon

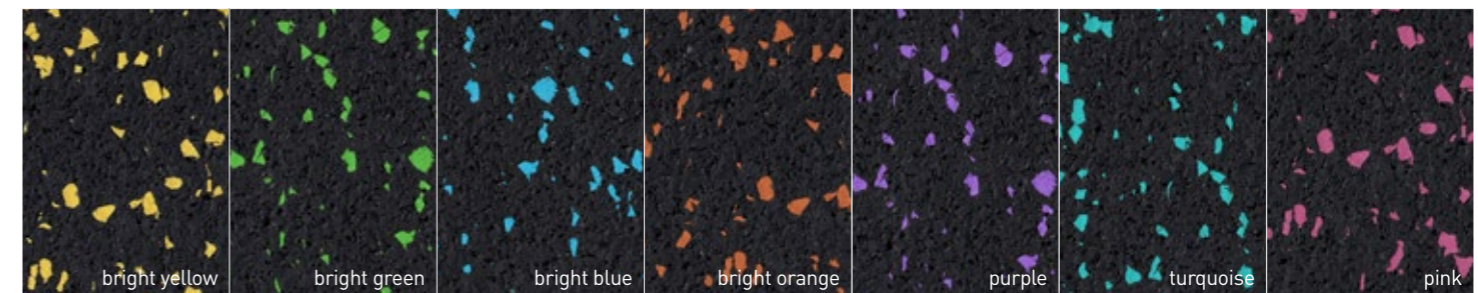

» SPORTEC® giga

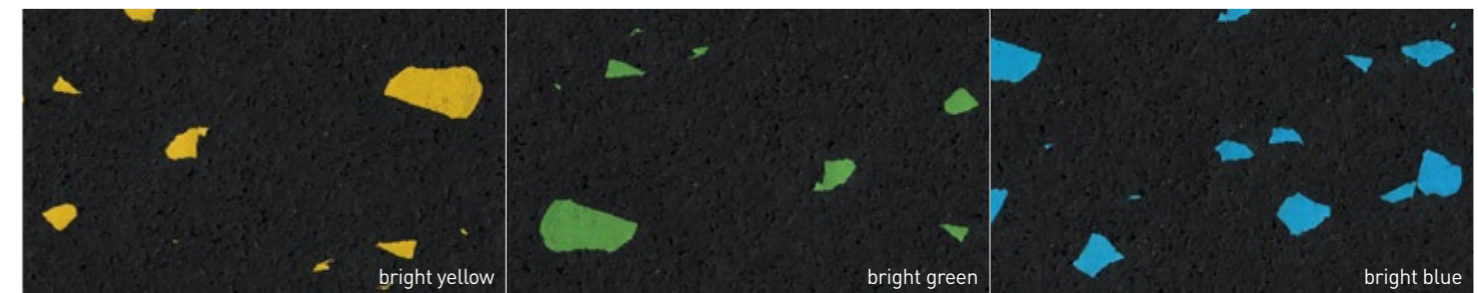





DESIGN SERIES





COLOURFUL. ANTI-SLIP.
FIRE-RETARDANT.




SPORTEC® purcolor | variant | UNI classic.

All products of our design series consist of 100% EPDM granules. The products are highly resistant, offer effective noise reduction and provide comfort during exercising. Thanks to the different design options, the colours can be perfectly matched to gym interiors and with SPORTEC® variant, you can create your individual mix for even greater freedom of design!


» SPORTEC® purcolor

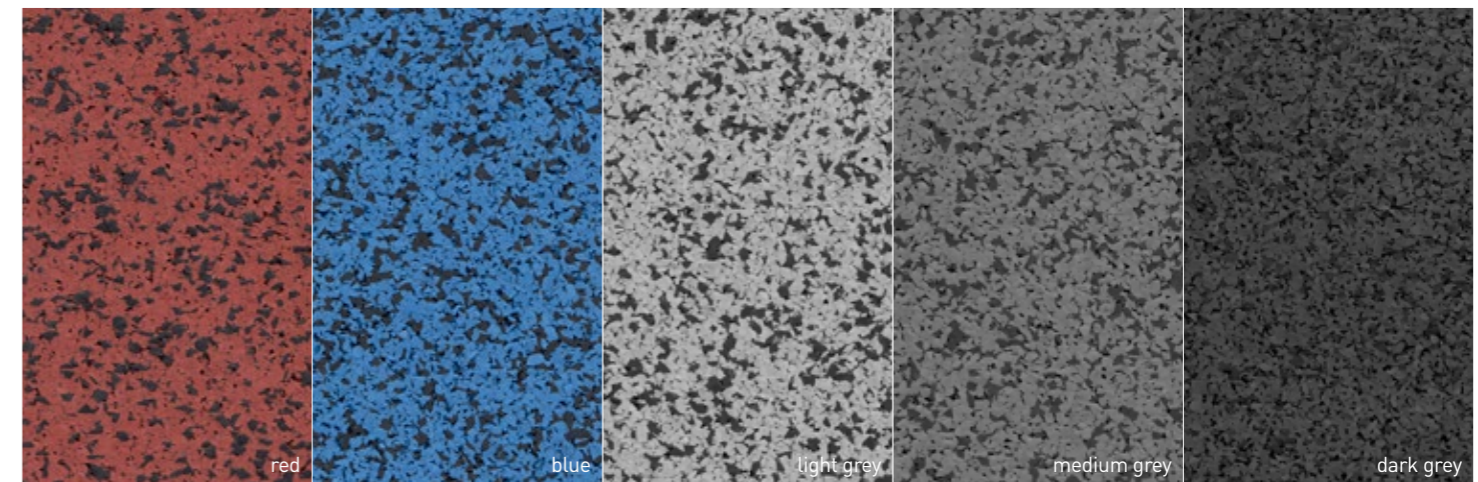

» SPORTEC® variant

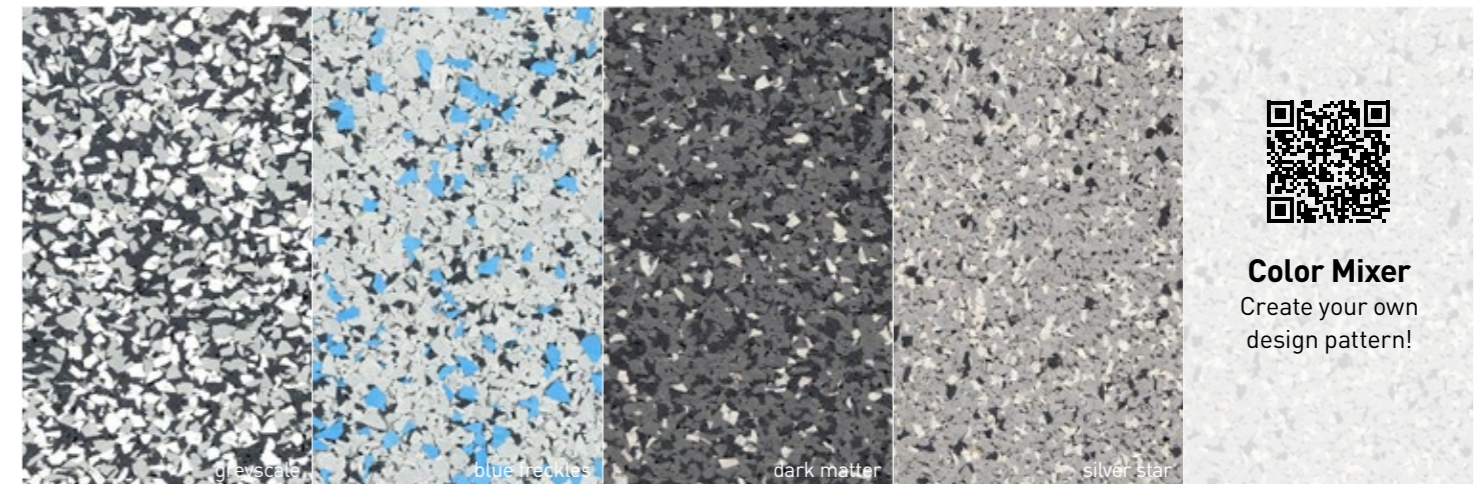

» SPORTEC® UNI classic

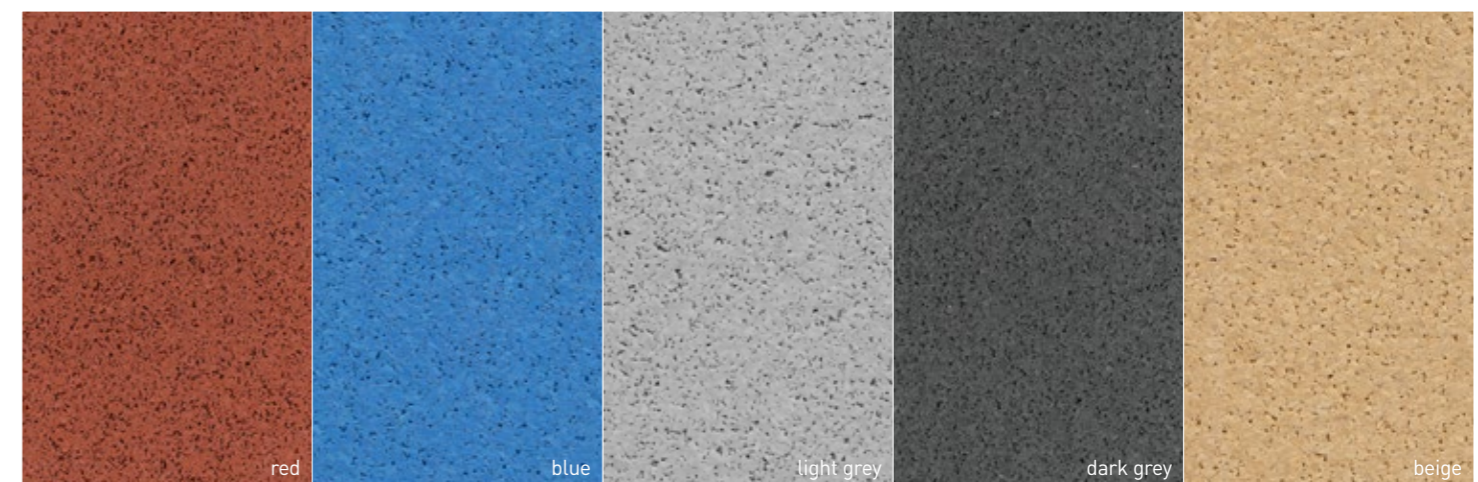



»» TILES SERIES




SHOCK ABSORPTION. DESIGN OPTIONS.
IMPACT SOUND IMPROVEMENT.

SPORTEC® style | base.


Whether you prefer a smooth finish or a granular structure to your tiles, both are possible with the SPORTEC® style and SPORTEC® base tiles. Available in 3 dimensions, SPORTEC® style comes with a multitude of colour finish possibilities which include options with a high fire resistance classification of C_{fl}-s1. SPORTEC® base tiles can also offer a C_{fl}-s1 option and are available in a black or grey granular finish.

»» SPORTEC® style




SPORTEC® edge and corner ramps available!
for stumble-proof transitions

surfaces SPORTEC® color 15 / color 0




surfaces SPORTEC® neon

only available for 1,000 x 500 x 30 mm tiles





surfaces SPORTEC® purcolor



surfaces SPORTEC® UNI versa



»» SPORTEC® base

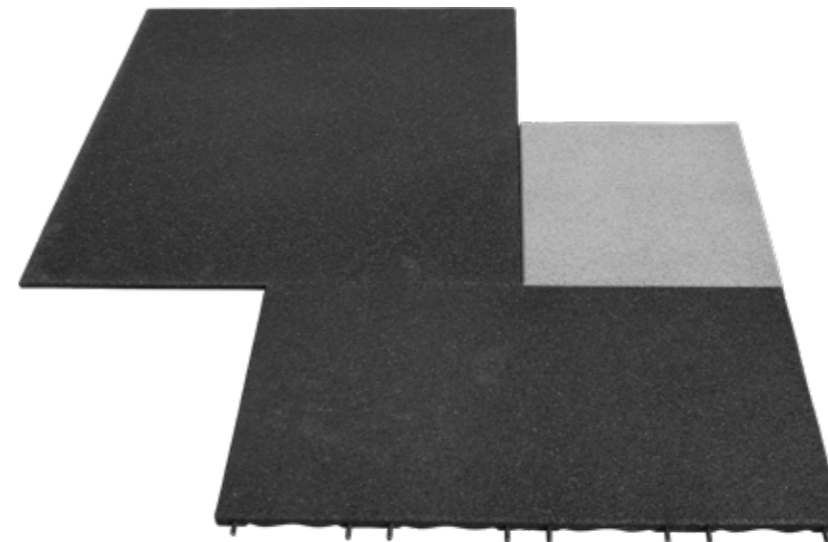



SPORTEC® edge and corner ramps available!
for stumble-proof transitions



black

grey

» SPORTEC® multi-pavers

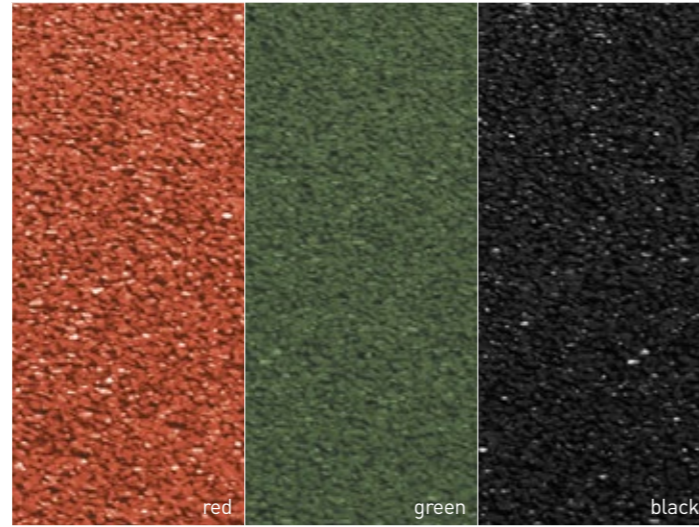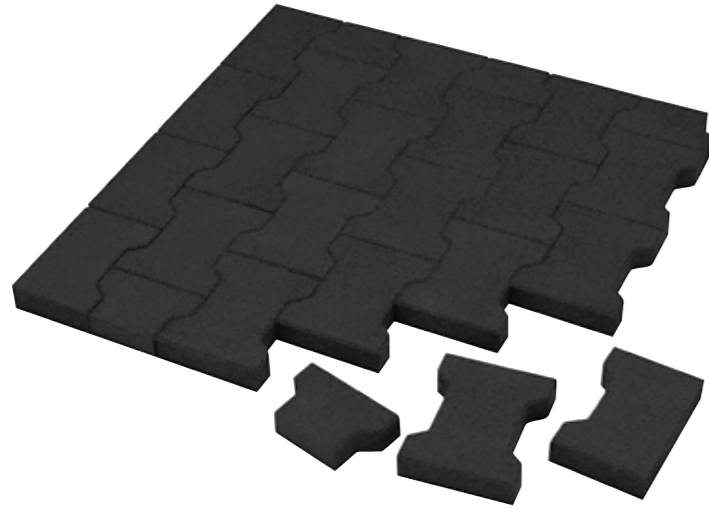


red


green

black

» SPORTEC® puzzle 2.0

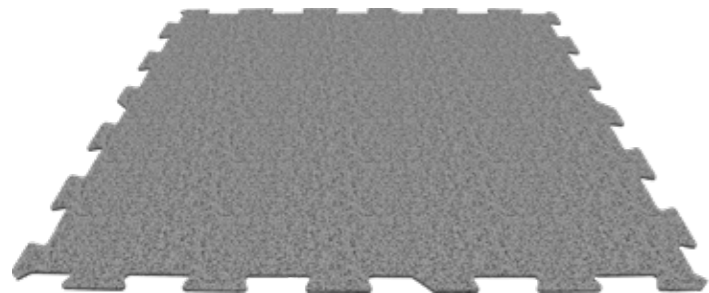


purcolor

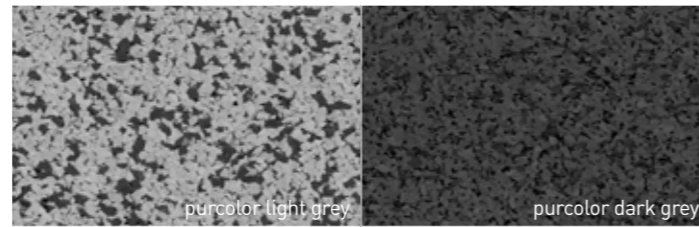


purcolor light grey

purcolor dark grey

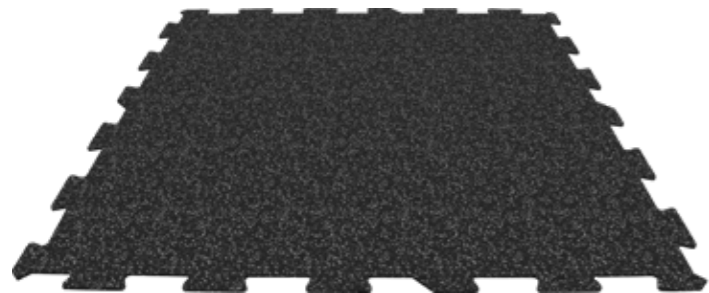

color

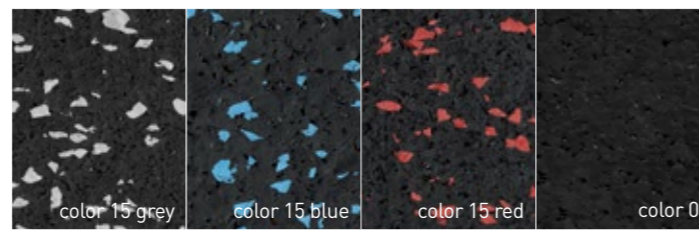


color 15 grey


color 15 blue

color 15 red

color 0

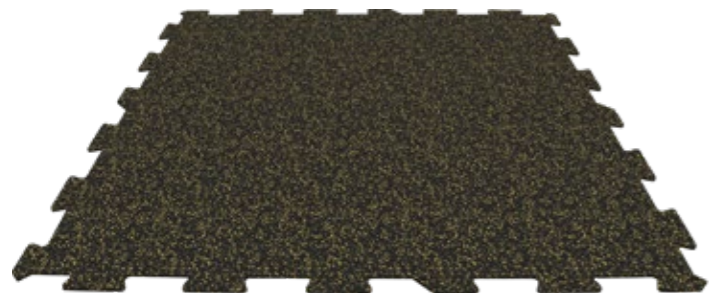

neon

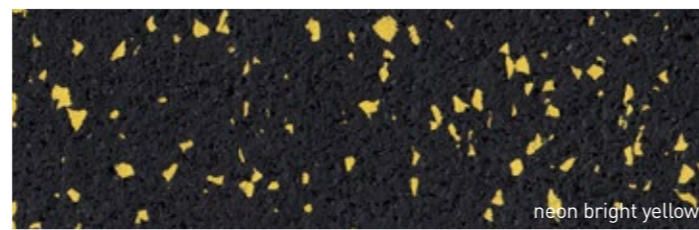

neon bright yellow



» GYMCOUSTIC SERIES



TESTED SYSTEMS. DESIGN OPTIONS.
SUPERIOR SOUND & VIBRATION CONTROL.




SPORTEC® Gymcoustic Systems.

Acoustic and vibration problems in gyms are a big challenge, but avoiding them can be easy. Our Gymcoustic systems are finishing floor solutions offering increasingly high performances which can be applied directly on top of the existing solid subfloors. This means they are ideal for renovations and can also be used in new-builds. As well as their technical performance, they respond to the practical challenge of maintaining athletes stability underfoot ensuring that both the gym and its members benefit.

Gymcoustic Basic Line

95%
Stability rating



Impact sound improvement **24 dB**
 Shock absorption **46.0 %**
 ΔL_{iAFmax} 50 kg **27.2**

Impact sound improvement **25 dB**
 Shock absorption **51.4 %**
 ΔL_{iAFmax} 50 kg **24.3**

Gymcoustic All-round Line

93%
Stability rating



Impact sound improvement **28 dB**
 Shock absorption **52.7 %**
 ΔL_{iAFmax} 50 kg **31.9**

Impact sound improvement **30 dB**
 Shock absorption **55.6 %**
 ΔL_{iAFmax} 50 kg **32.6**

Gymcoustic Acoustic Line

92%
Stability rating



Impact sound improvement **35 dB**
 Shock absorption **53.6 %**
 ΔL_{iAFmax} 50 kg **32.5**


Impact sound improvement **34 dB**
 Shock absorption **53.2 %**
 ΔL_{iAFmax} 50 kg **26.4**

Performance Line **96%** Stability rating



Impact sound improvement **29 dB**
 Shock absorption **67.3 %**
 ΔL_{iAFmax} 50 kg **38.2**

Performance Line **89%** Stability rating

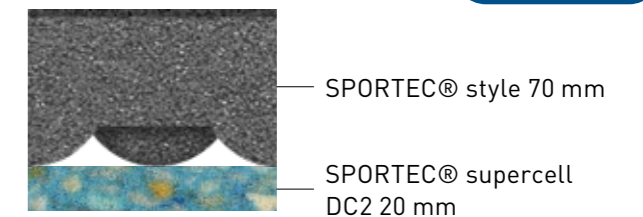

Impact sound improvement **42 dB**
 Shock absorption **74.3 %**
 ΔL_{iAFmax} 50 kg **50.7**



SPORTEC® Gymcoustic brochure
 Need more technical information and diagrams? Please download our Gymcoustic brochure.





» TRACK SERIES



TRACK-STYLE. JOINT-PROTECTIVE.
SPIKE-RESISTANT.




SPORTEC® fusion. UNI classic/versa sandwich.

The products of the Track Series are combinations of the EPDM surfaces SPORTEC® purcolor / UNI classic / UNI versa with the proven elastic layer SPORTEC® standard 2.0. This combination prevents joint damage and injuries and is therefore particularly suitable for use as running and sprint tracks in fitness centres both indoor and outdoor.



» SPORTEC® fusion




pre-fabricated double-layer rolls

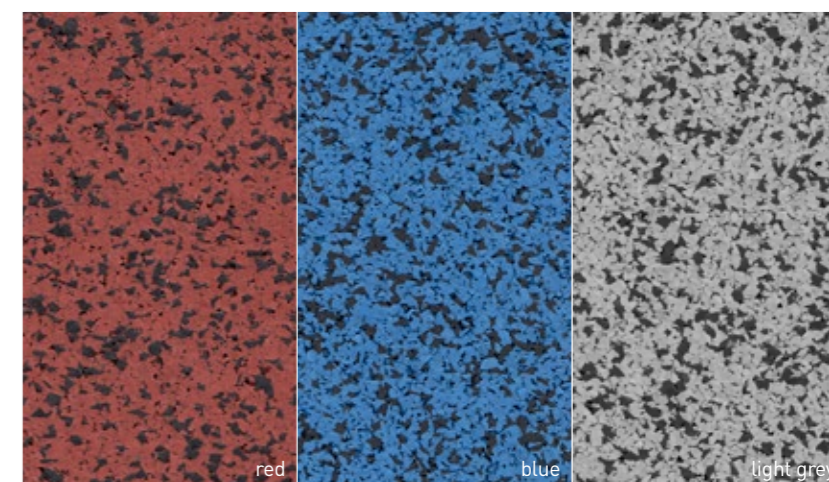

» SPORTEC® UNI classic sandwich

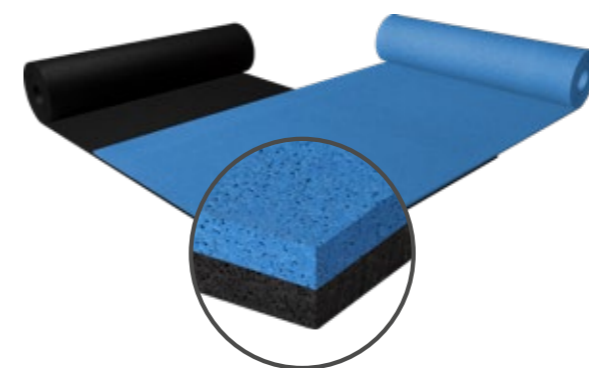


delivered in two separate rolls



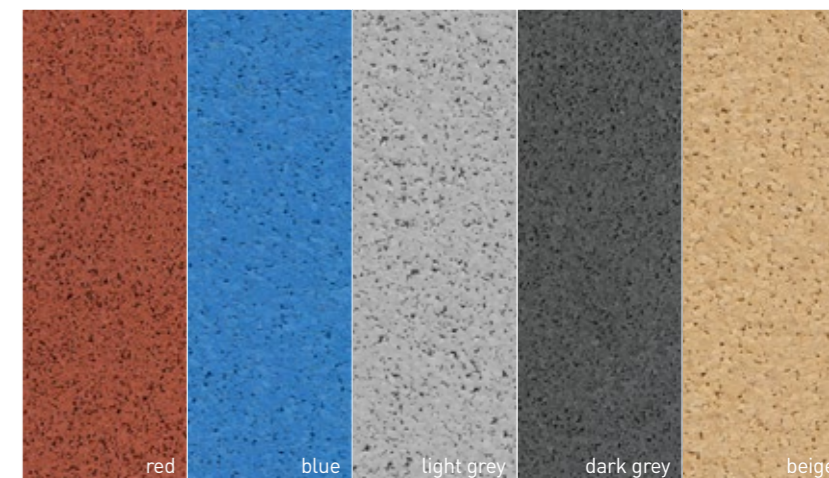


» SPORTEC® UNI versa sandwich



delivered in two separate rolls

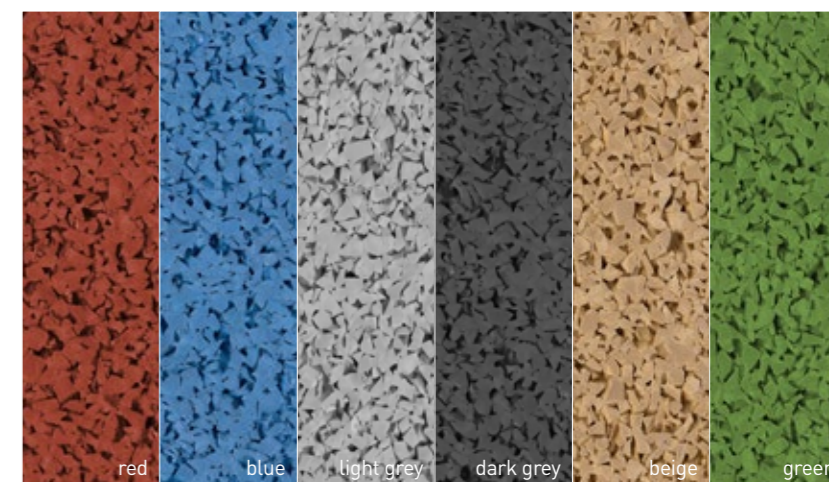

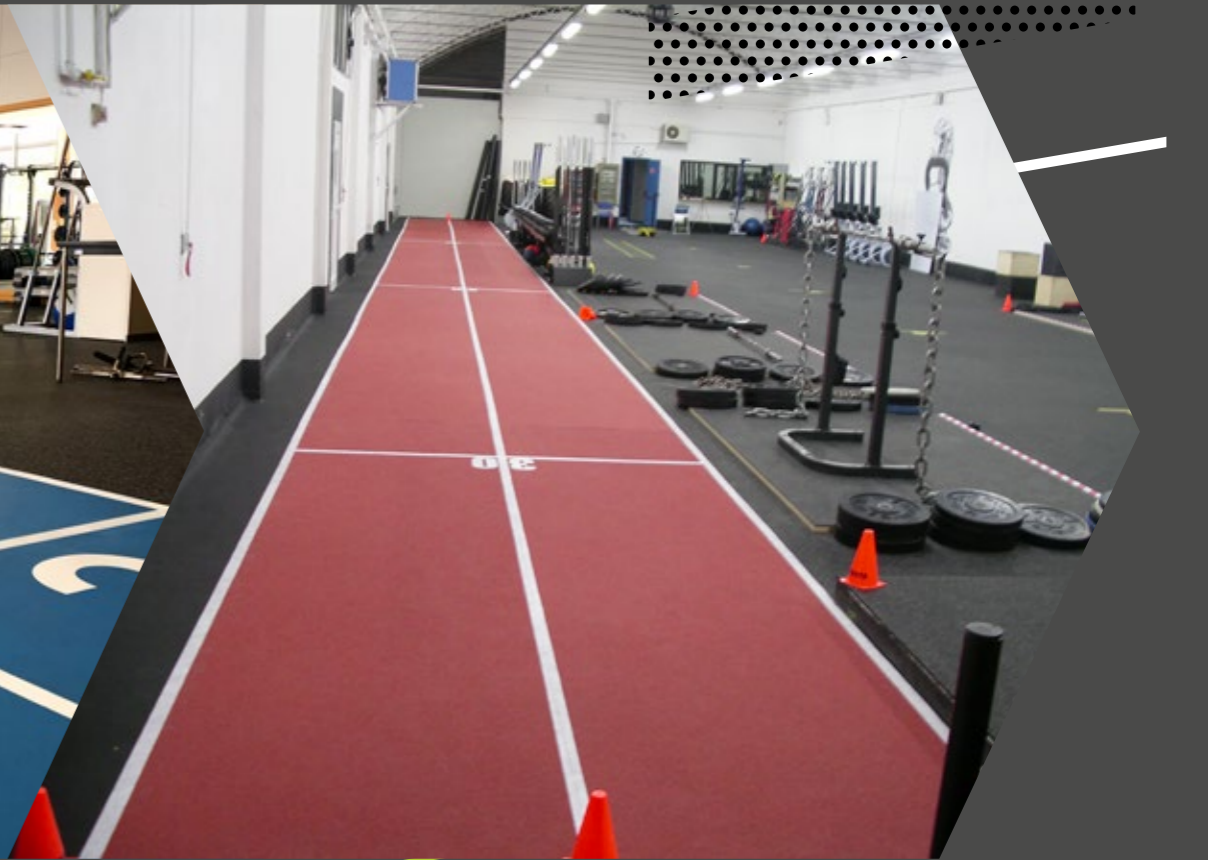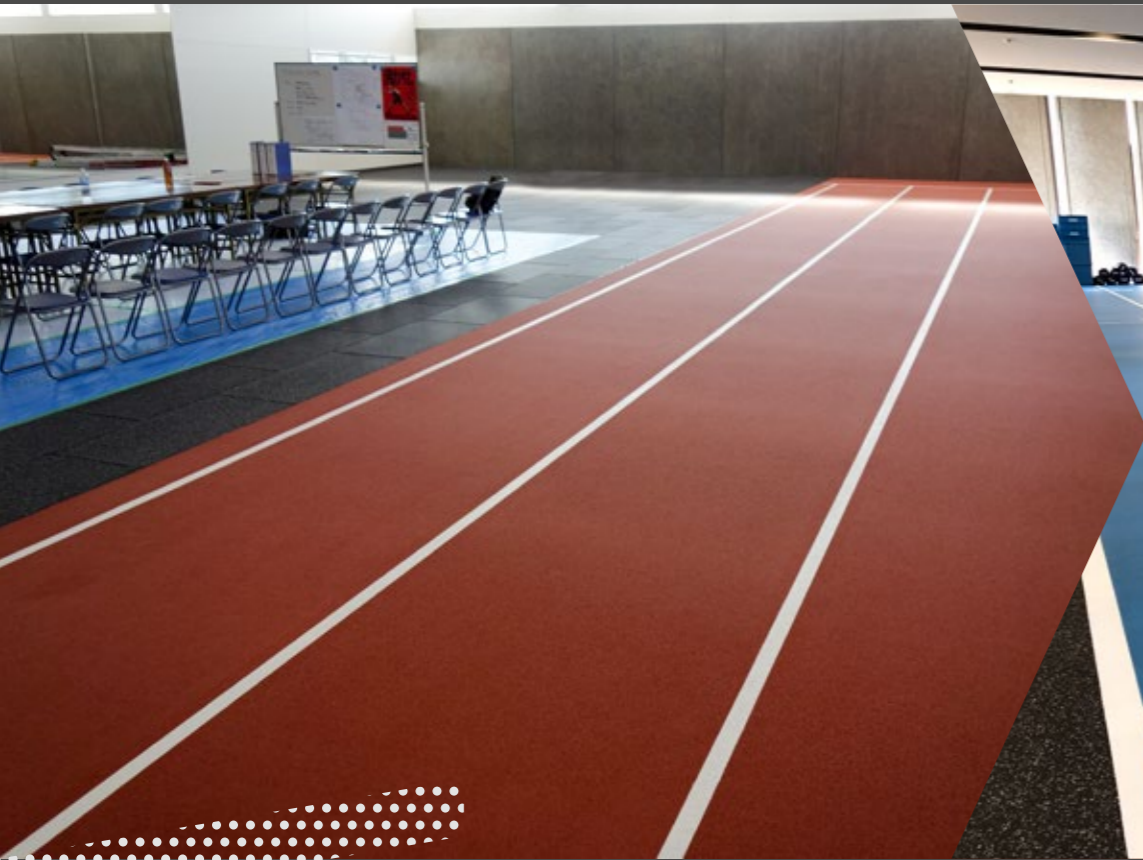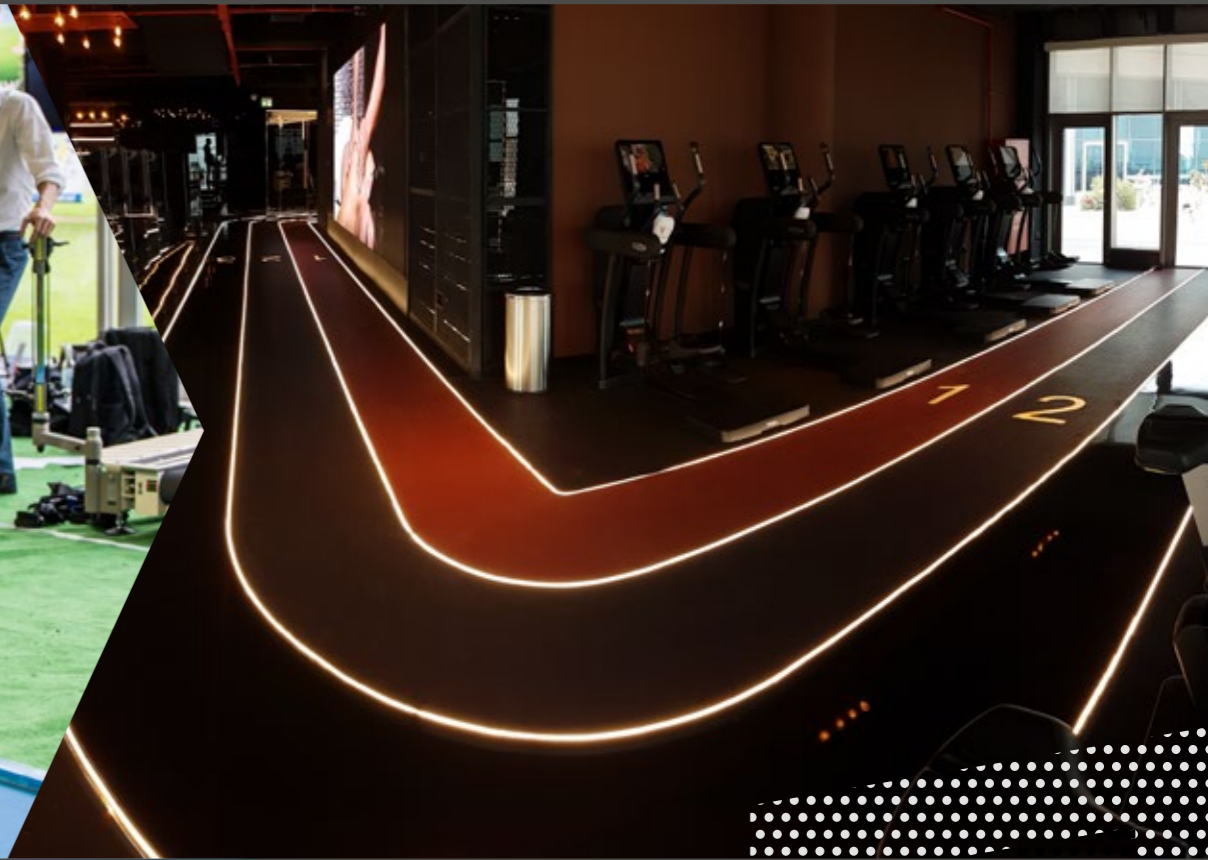

» POWERTURF SERIES



DTEX 8000. HIGH STITCH RATE.
100% CUSTOMISABLE.



SPORTEC® powerturf.

SPORTEC® powerturf is the synthetic artificial turf for your gym. Thanks to its very high density, the turf can withstand the high demands of exercises on the floor, including sprints or training with a weight sled. SPORTEC® powerturf 1.0, 2.0 and 3.0 offer the possibility to choose from different colours. SPORTEC® powerturf 4.0 allows you to fully customize the design of your artificial turf.

» SPORTEC® powerturf 1.0 / 2.0 / 3.0




powerturf 1.0



powerturf 2.0



powerturf 3.0

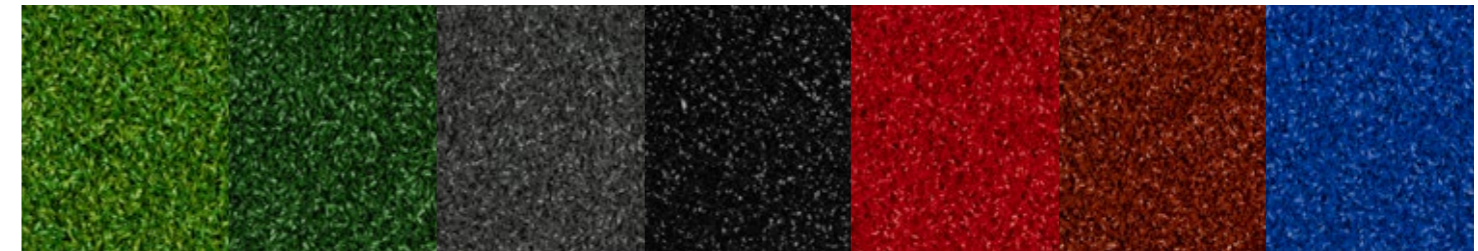

SPORTEC® powerturf 4.0



100% customisable!

You can design entirely according to your own ideas. From patterns to lines to logos of your gym: Anything is possible.



» E-LAYER SERIES




**LESS SOUND. LESS VIBRATIONS.
MORE COMFORT.**




SPORTEC® shockwave 3D. supercell DC 2. team cup X

E-Layers are underlays for additional impact sound insulation and comfort. They can be installed under all SPORTEC® floor coverings in indoor areas and are especially suited under SPORTEC® style tiles for weight-lifting areas. Depending on the requirements on impact sound insulation and softness of the flooring, there is always a suitable solution.


» SPORTEC® shockwave 3D

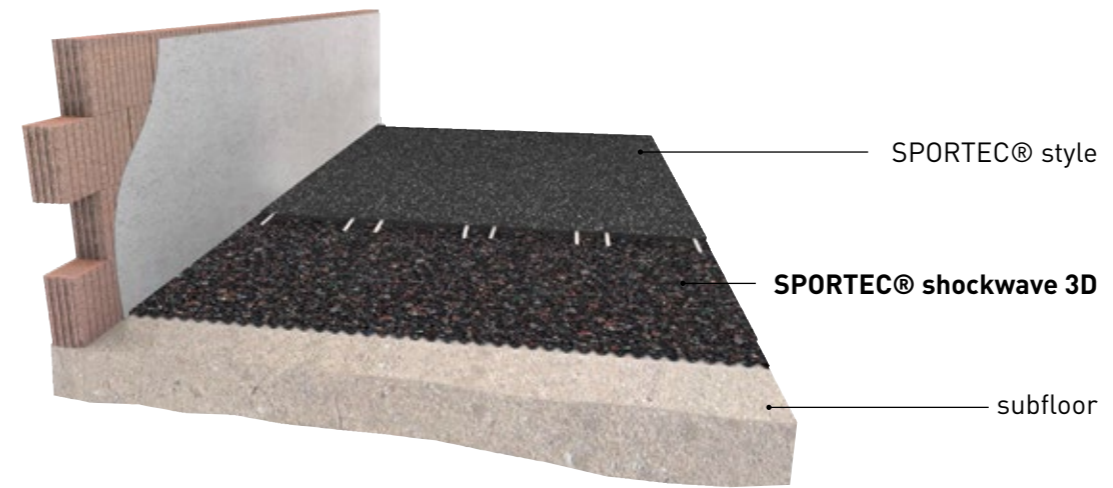

» SPORTEC® supercell DC 2

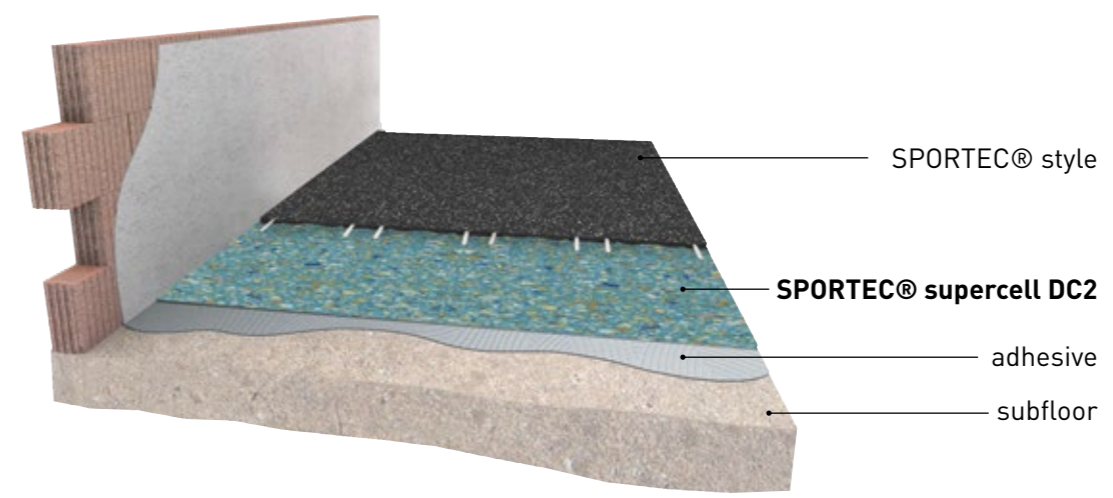

» SPORTEC® team cup X

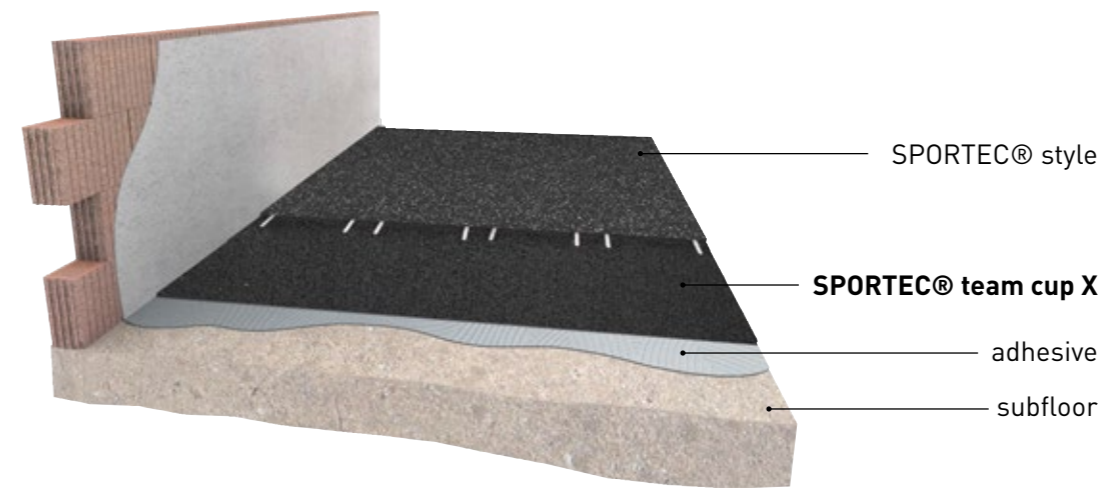

» EXTRAS





MORE FOR YOUR FLOOR.



SPORTEC® absorber pads. FT Design templates.

SPORTEC® absorber pads are a supportive system for the isolation of vibrations generated by treadmills. A set consists of two front and two back pads that are placed directly under the feet of the treadmill. SPORTEC® FT design is the easy way to design creative and functional training areas and provide a large variety of different training possibilities.

» SPORTEC® absorber pads

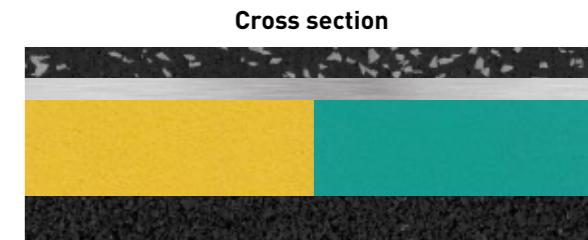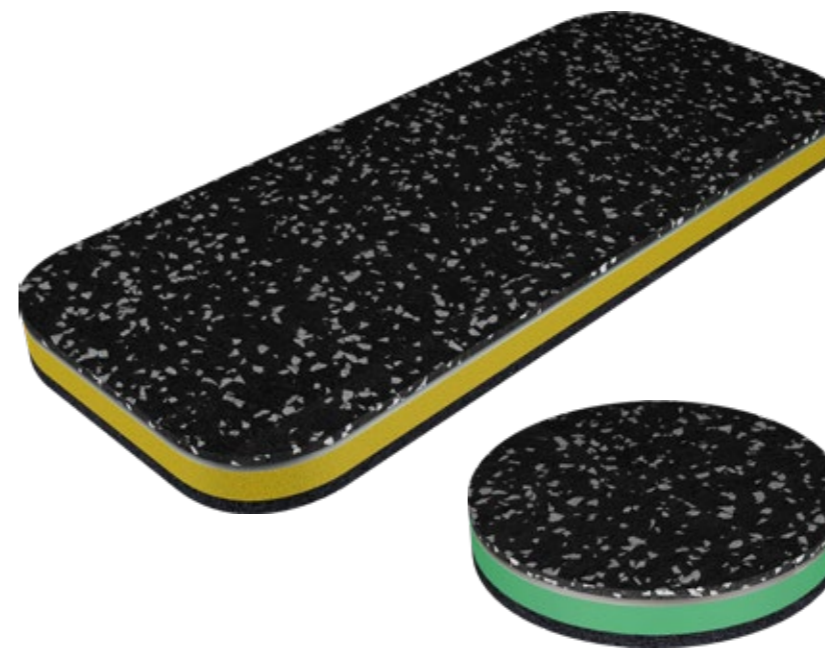

» SPORTEC® Functional Training Design templates

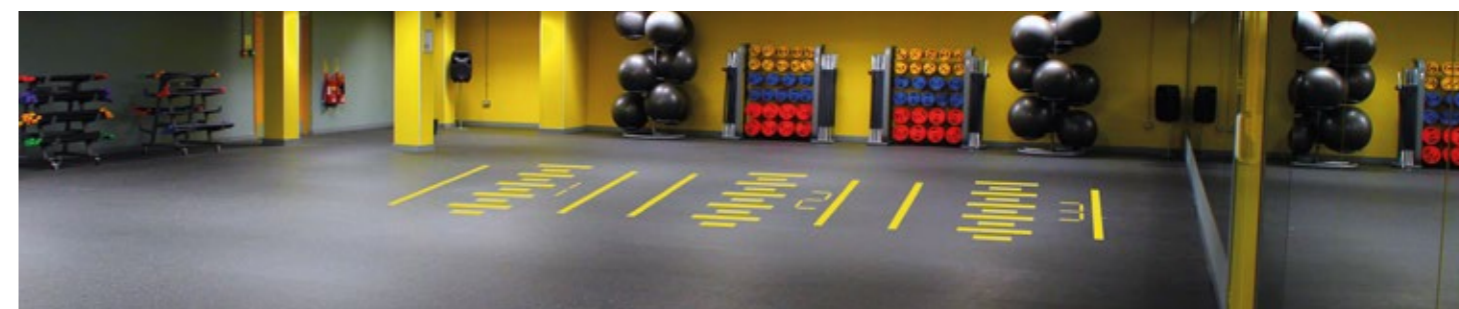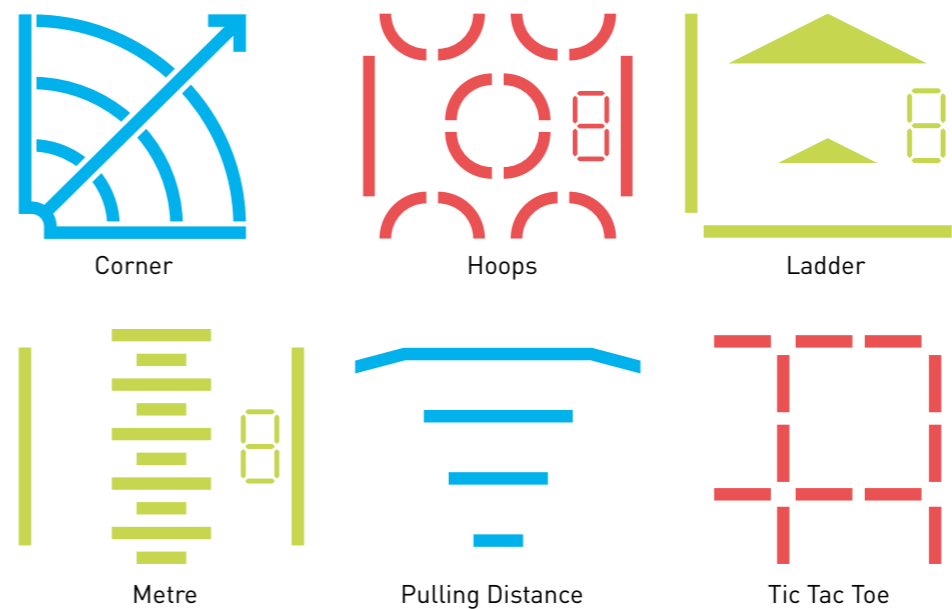

INSTALLATION ACCESSORIES



**GLUEING. SEALING.
CLEANING.**

SPORTEC® varnish. cleaner. adhesive.


We provide the necessary installation accessories for our SPORTEC® floor coverings. The varnish protects the floor and enables easier cleaning. With our cleaner you can remove even the most stubborn dirt from the floor. Finally, our PU glue provides the strength and elasticity to make sure our floors are permanently fixed to the sub-base.

» SPORTEC® Varnish RZ TURBO PROTECT ZERO



Packsize	5 l + 500 ml hardener
Pot life	120 Min. (20 °C / 60 % relat. LF)
Set to foot traffic	after approx. overnight drying
Final strength	after approx. 7 days
Consumption amount	100 ml/m ²


based on a room temperature of 20 °C

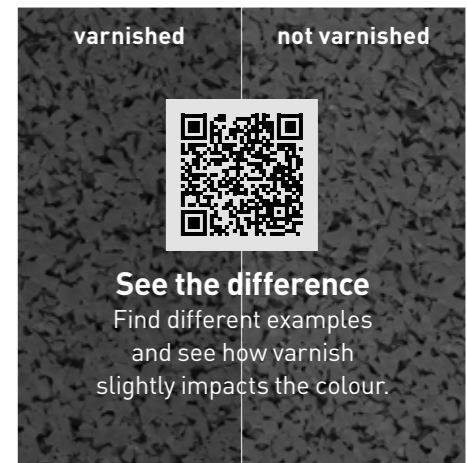

» SPORTEC® Cleaner RZ INTENSIVE CLEANER



Packsize	750 ml or 5 l
Working temperature	18 - 25 °C
Area	10 l : 250 m ²
Consumption amount	40 ml/m ²

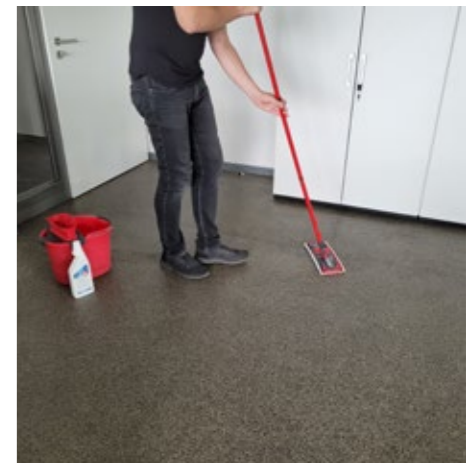


» Adhesive SPORTEC® UN 700




Packaging	Set of 10, 25 or 28 kg (mixing ratio Base : Curing Agent = 850 : 150)
Pot life	approx. 30-60 minutes
Can be walked on	after approx. 8 hours
Final strength	after approx. 36 hours
Consumption amount	700 g/m ²

based on a room temperature of 20 °C

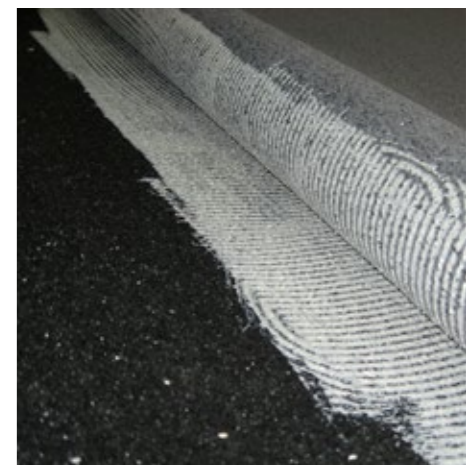

Technical Data

SPORTEC® color



Material fine-grain recycled rubber tyre granules (black) with 5, 10, 15, 20 % EPDM colour granules, PU-elastomer bonded

Dimensions **Roll width:** 1,500 mm
Roll length
Length m/Thickness mm:
30/4, 20/6, 15/8, 12/10

Thicknesses **color 0:** 4, 6, 8, 10 mm*
color 5, 10, 20: 6 mm*
color 15: 4, 6, 8, 10 mm
[*other thicknesses available on request]

SPORTEC® neon




Material fine-grain recycled rubber tyre granules (black) with EPDM colour granules, PU-elastomer bonded

Dimensions **Roll width:** 1,500 mm
Roll length
Length m/Thickness mm:
30/4, 20/6, 15/8

Thicknesses 4, 6, 8 mm (other thicknesses available on request)

SPORTEC® style




Material Polyurethane-bonded recycling tyre rubber granules, different surfaces

Dimensions **30 mm:** 500 x 500 / 1,000 x 500 mm / 1,000 x 1,000 mm
70 mm: 500 x 500 mm

Thicknesses 30, 70 mm

SPORTEC® base



Material **base MS:** Polyurethane-bonded recycling tyre rubber granules
base FR: Polyurethane-bonded EPDM rubber granules

Dimensions 500 x 500 mm / 1,000 x 500 mm / 1,000 x 1,000 mm (only for 20 mm)

Thicknesses 30 mm, 20 mm (only for 1,000 x 1,000 mm)

SPORTEC® giga




Material fine-grain recycled rubber tyre granules (black) with EPDM colour granules, PU-elastomer bonded

Dimensions **Roll width:** 1,500 mm
Roll length
Length m/Thickness mm:
20/6, 15/8, 12/10

Thicknesses 6, 8, 10 mm (other thicknesses available on request)

SPORTEC® purcolor




Material 100 % EPDM granules
PU-elastomer bonded

Dimensions **Roll width:** 1,250 mm
Roll length
Length m/Thickness mm:
30/4, 20/6, 15/8

Thicknesses 4, 6, 8 mm (other thicknesses available on request)

SPORTEC® edge and corner ramps




Material recycled tyre rubber

Dimensions 1,000 x 250 mm

Thicknesses **edge ramp:** 30/10, 70/20 mm
corner ramp: 30/10, 70/20 mm

SPORTEC® multi pavers




Material recycled tyre rubber

Dimensions 200 x 165 mm (full)
100 x 165 mm (half)
200 x 140 mm (starter)

Thicknesses 43 mm

SPORTEC® variant



Material EPDM colour combinations, PU-elastomer bonded

Dimensions **Roll width:** 1,250 mm
Roll length
Length m/Thickness mm:
30/4, 20/6

Thicknesses 4 or 6 mm (other thicknesses available on request)

SPORTEC® UNI classic




Material fine-grain EPDM granules, PU-elastomer bonded

Dimensions **Roll width:** 1,250 mm
Roll length: 15 m

Thicknesses 4 mm (other thicknesses available on request)

SPORTEC® puzzle 2.0



Material SPORTEC® color, SPORTEC® purcolor or SPORTEC® neon

Dimensions 1,030 mm / 1,030 mm
Covering dimensions: 1,000 x 1,000 mm

Thicknesses 6, 8, 10 mm

SPORTEC® powerturf 1.0, 2.0, 3.0



Material **Surface:** Polyethylene fibres, 100% monofilament (without infill)
Underside: Support fabric: 100% polypropylene and latex

Dimensions **Roll width:** 2,000 mm
Roll length
15.0 m, other lengths are available on request in 1m steps
(e.g. 20.0 / 21.0 / 22.0 m)

Thicknesses **Pile height:** 13 mm

More technical data:

visit www.kraiburg-relastec.com/sportec/en

SPORTEC® powerturf 4.0



Material **Surface:** Polyethylene fibres, 100% monofilament (without infill)
Underside: Support fabric: woven polyester and latex

Dimensions **Roll width:** 2,000 / 4,000 mm (other widths upon request)
Roll length 15.0 m, other lengths are available on request in 5m steps (e.g. 20.0 / 25.0 / 30.0 m)

Thicknesses **Pile height:** 13 mm

SPORTEC® fusion



Material **top layer:** Fine-grain EPDM colour granules bonded with PU-elastomer
elastic layer: Fine-grain recycled tyre rubber granules bonded with PU-elastomer

Dimensions **Roll width:** 1,250 mm
Roll length: 15 m

Thicknesses 8 mm

SPORTEC® supercell DC 2




Material A mixture of recycled PU-foam and Latex granules bonded with polyurethane elastomer

Dimensions 2,000 mm x 1,000 mm

Thicknesses 10 and 20 mm

SPORTEC® Absorber Pads



Material see structure on product page

Dimensions **Front Pads:** 380 x 160 x 25.5 mm
Back Pads: Ø 150 mm x 25.5 mm

Thicknesses 25.5 mm

SPORTEC® UNI classic sandwich



Material **top layer:** Fine-grain EPDM colour granules, PU-elastomer bonded
elastic layer: Fine-grain recycled rubber tyre granules, PU-elastomer bonded

Dimensions **Roll width** **top layer:** 1,250 mm
elastic layer: 1,500 mm
Roll length **top layer:** 15 m
elastic layer: 30 m (other lengths available on request)

Thicknesses **top layer:** 4 mm
elastic layer: standard thickness SPORTEC® standard (other thicknesses available on request)

SPORTEC® UNI versa sandwich



Material **top layer:** coarse-grained EPDM granules bonded with polyurethane elastomer
elastic layer: fine rubber granules bonded with polyurethane elastomer

Dimensions **Roll width** **top layer:** 1,250 mm
elastic layer: 1,500 mm
Roll length **top layer:** 30 m
elastic layer: 30 m (other lengths available on request)

Thicknesses **Surface:** 4 mm
Underlay: standard thickness SPORTEC® standard (other thicknesses available on request)

SPORTEC® FT Design Templates




Material Prefabricated stencils to stick onto existing SPORTEC® flooring

Dimensions 1.00m x 1.00m (Corner, Tic Tac Toe)
1.00m x 1.25m (Hoops, Ladder, Meter, Pulling Distance)


Colours Standard colors of 2-components PU-paint: blue (RAL 5012), green (RAL 6018), grey (RAL 7040), white (RAL 9016), yellow (RAL 1021)

Other SPORTEC® brochures

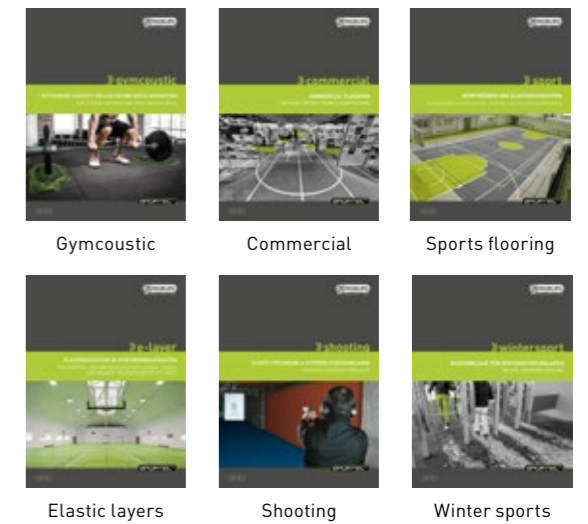

Gymcoustic Commercial Sports flooring
Elastic layers Shooting Winter sports

SPORTEC® team cup X




Material A mixture of black recycling rubber granules bonded with polyurethane elastomer

Dimensions **Roll width:** 1,250 mm
Roll length [m/ at Thickness mm] 15/8, 12/10, 10/12, 8/15

Thicknesses 8, 10, 12, and 15 mm

SPORTEC® shockwave 3D



Material A mixture of recycled rubber granules bonded with polyurethane elastomer



Dimensions **Roll width:** 1,250 mm
Roll length: 8 m

Thicknesses 8/4 mm

EPDM colour range





  **General installation instructions**


Required tools

gloves, measuring tape, cutter, chalk line, jigsaw and rubber hammer for tiles, pressure roller for rolls



Acclimatisation

The floor covering should be unstacked from the pallet before laying and stored 1-2 days where it will be laid.

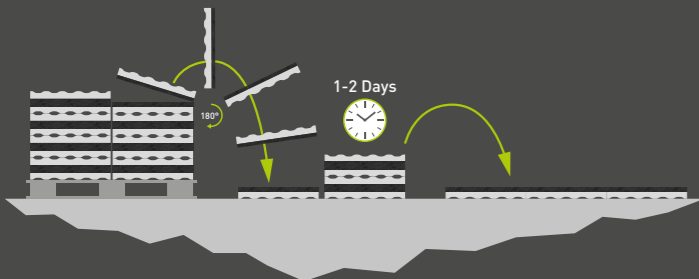

Adhesive (700 g/m²), varnish (100 ml/m²), cleaner (40 ml/m²)
Please add the required quantity to your order.

Detailed installation instructions for each product


www.kraiburg-relastec.com/sportec/en/downloads

Installation videos on YouTube




Installation of rolls

SPORTEC® rolls should always be aligned in the same direction to the brightest part of the room.

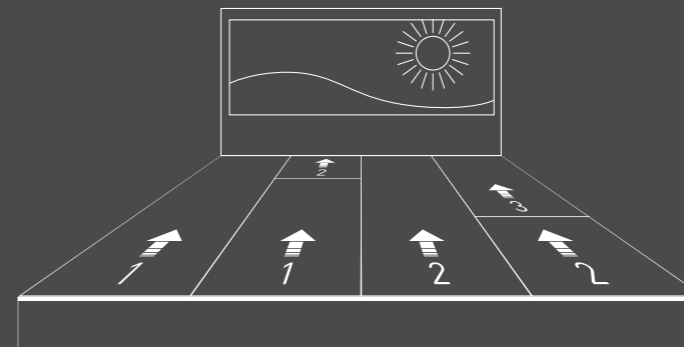

SPORTEC® rolls should be laid with pressure on the butted joints (close to overlapping). No welding or joint filler is required.

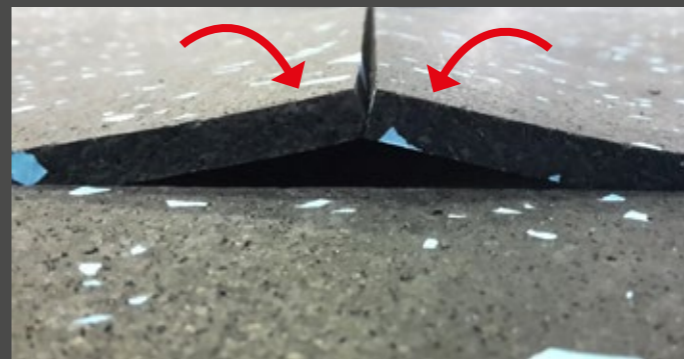


SPORTEC® rolls should be completely glued to the floor. Thicker rolls (from 10 mm thickness) can be fixed with industrial double-sided adhesive tape.



Installation of tiles


Our tiles are designed for installation without adhesive and should be laid in T-joints. The tiles are connected to each other via pre-installed connectors.

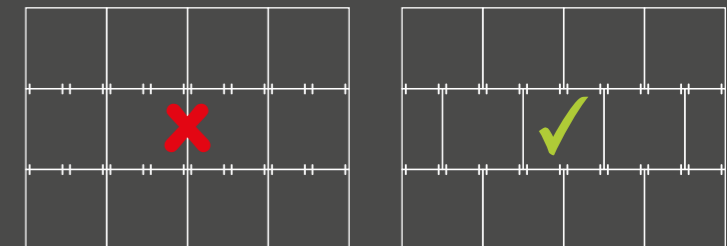

All tiles can be cut with a jigsaw, industrial cutter or table saw.



Slight unevenness of the substrate can be negated as the tiles' substructure compensates for this. Do not hesitate to contact us for more detailed advice.




Why should I use rubber flooring in my fitness center? 🏋️

Rubber floors are soft, elastic and extremely robust all at the same time. On top of that, they are non-slip, help to reduce noise and vibration and are environmentally friendly. So, perfect for your gym!



How thick does the rubber floor have to be?

For cardio areas it's best to take 6mm, 10mm for strength training areas and our SPORTEC® style tile in 30mm thickness for free-weight areas. As an all-rounder for small fitness centers you can also take 8 mm rolls.

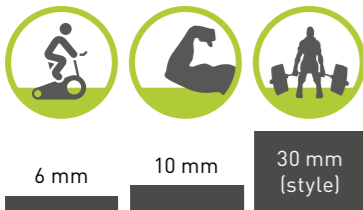

Do I need a varnish? ✨

When exercising extremely often on the surface, a varnish makes sense to facilitate maintenance. However, we don't recommend varnish in wet areas or zones with punctual loads (e.g., dumbbell drop areas or ice rinks).



Can I repair a damaged varnished area?

Small damaged areas can be repaired with the RZ Refresher Set. For larger areas you have to remove the old varnish and then reseal.



The tenant under my gym complains about noise. 🗣️ How can your flooring help me?

Our floor coverings can help to improve acoustics. For example SPORTEC® style achieves a footfall sound improvement of approx. 24dB (according to EN ISO 10140).



Do I need an extra elastic layer?

Rubber naturally helps to reduce sound and vibration, but in extreme cases adding an extra elastic layer helps indeed.

I have floor heating. Can I install a rubber floor on it?

You can use our roll materials such as SPORTEC® color or purcolor, up to a total thickness of 20mm thickness, on under-floor heating.

Is it true that rubber smells?

Like any other flooring, rubber has a typical odour. We neutralise this as much as possible in our production process and after installation it will reduce over time, but of course it helps if the rooms are well ventilated.


What about fire protection? 🔥

Our floorings have different fire classes from E_{fl} to C_{fl}-s1. For all tenders we have a fitting solution.



Which glue should I use?

All SPORTEC® products should be bonded with a 2-component PU adhesive. This is very resistant, especially for outdoor use.

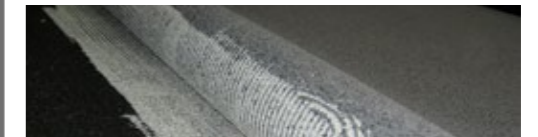

How long does the floor last? 🕒

Typically 8-10 years under normal use.

What do I do with the floor when I want to change it after a few years?

You do not have to tear it out. Leave it simply as an acoustic underlay for the new floor, whether it be tiles, parquet, laminate or even SPORTEC®!

Who is my contact person? 👤

On our homepage you will find the right contact person for your region.
www.kraiburg-relastec.com/sportec/en/contact-persons



SUSTAINABILITY

Corporate Carbon Footprint, Product Carbon Footprint, Energy Management, Social and economic sustainability at KRAIBURG Relastec



Recycling of up to 60,000 t material

Every year we recycle and give new life to approx. 60,000 tonnes of old tyres and industrial rubber waste.



Reduction of CO₂ emissions

By using recycled rubber granulate, we save more than 130,000 tonnes of CO₂ emissions per year compared to using virgin rubber.



Corporate Carbon Footprint

The CCF has been certified in accordance to the Greenhouse Gas Protocol.



Coming soon: Product Carbon Footprint

The PCF is measured and audited in accordance with ISO 14067 and ISO 14040/44 audited.



Energy management: ISO 50001

Our energy management system is certified in accordance with ISO 50001 guidelines. Energy-relevant topics are taken into account in all processes of the organisation.

ecovadis

Coming soon: Certification by ecovadis

The ecovadis rating covers numerous management systems to ensure a sustainable procurement program.



Member of NEW LIFE initiative

The declared aim of NEW LIFE is to demonstrate the advantages of recycled products from End-of-Life Tyres (ELT) to the media, politicians and the general public and to motivate them to act sustainably.

More information:
www.initiative-new-life.de/en



Social sustainability

Acting in accordance with our values such as equal opportunities, social responsibility, respectful treatment and transparency, are the foundation for active social sustainability.



Economic sustainability

As a family business, KRAIBURG Holding pursues a long-term strategy. Profits generated are used to a significant extent to make our holistic business model increasingly efficient and sustainable.



CORPORATE CULTURE

Defined values, social norms and guidelines for common action and cooperation inside and outside KRAIBURG Relastec.



Equal opportunities

We stand for equal opportunity, diversity, inclusion and religious diversity.



Social responsibility

Fair pay, collective bargaining, further education, career development, work-life integration.



Respect

We are honest, reliable, respectful and trustworthy towards our colleagues and partners.



Strong decision-making powers

We ensure speed in process handling, faster technology optimisations and lean processes.



Responsible for our actions

We take responsibility for all decisions and results. Error acceptance and the strong will to correct and learn from them are firmly anchored in our culture.



Transparency

We practice open and transparent cooperation both inside and outside the company.



WHAT SETS US APART



Internationality

With an export quota of ca. 80%, we have already exported our products to over 100 countries.



Fluid complaint management

Transparent and optimised processes ensure rapid processing.



Flexibility with customer requirements

We offer our partners customised options for packaging, labelling and delivery.



Long-term relationships

We maintain long-term relationships with our customers and suppliers based on mutual respect and fairness.



Marketing support

We provide you with the best possible support with images, graphics and in the design.



Personal contact

We do not hide behind support hotlines and contact forms. With us, you have competent contact partners.



Product quality

Our products meet the highest quality standards. They are durable, a perfect fit and made from high-quality raw materials.



Innovation and product design

We continuously develop new products according to the requirements of our customers and the market.

» **MORE FROM YOUR FLOOR**

SPORTEC®

Sports flooring and elastic layers
made from rubber granules

KRAIBURG Relastec GmbH & Co.KG
Fuchsberger Straße 4 · D-29410 Salzwedel

Sales International:
Tel. +49 (0) 8683 701 -340
Fax +49 (0) 8683 701 -4340
sportec@kraiburg-relastec.com
www.sportec-flooring.com

No liability accepted for errors or omissions. Subject to changes without prior notice.
© KRAIBURG Relastec GmbH & Co. KG 2023

Made in
Germany

Q qualityaustria
SYSTEMZERTIFIZIERT
ISO 9001:2015 NR. 00198/0
ISO 50001:2018 NR. 00070/0



NEW LIFE
INITIATIVE-NEW-LIFE.DE